


VIGOR BATTERY


VALVE REGULATED LEAD ACID BATTERY

Model No : NP 12 -6 6 V 12 AH

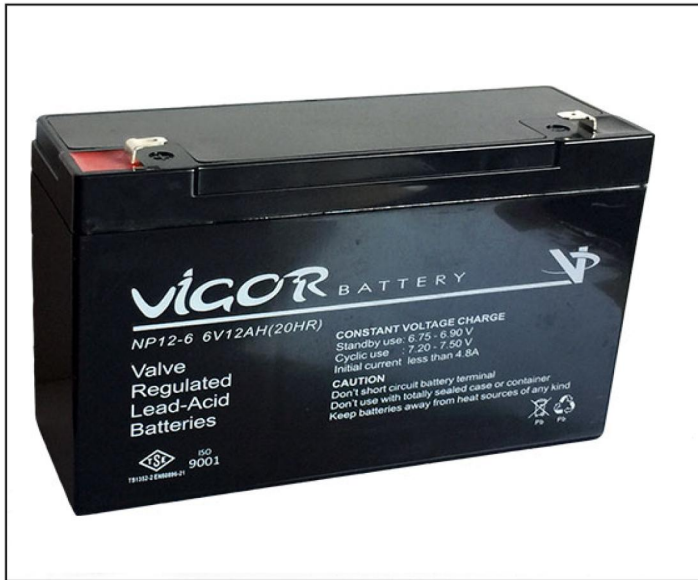

Plane Chart:


Unit:(mm) Terminal type:(F1)

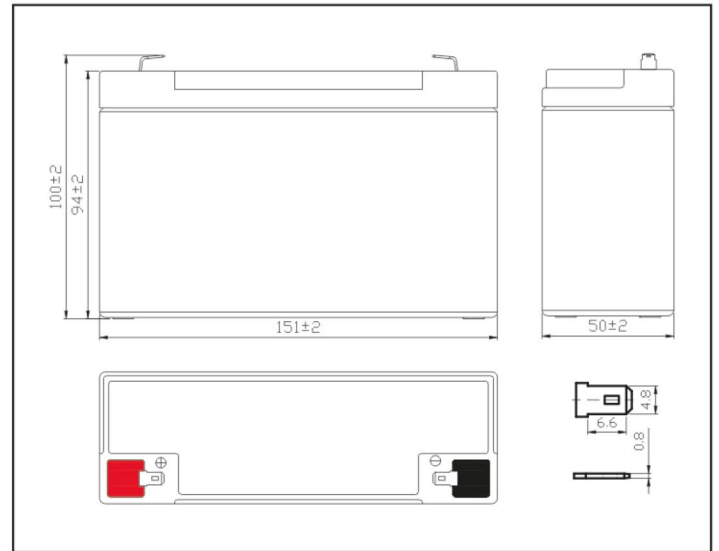


Parameter Chart:

Volts		6V	
Capacity(25°C)	(K20) 20 hours rate (0.6A)	12Ah	
Discharge Current Testing (25°C)	20 I ₂₀ rate (12A,27min)	45min	
	60 I ₂₀ rate (36A,7min)	10min	
Internal Resistance	Full Charged Battery 25°C	8mΩ	
Capacity Affected By Temperature	50°C	104%	
	25°C	100%	
	0°C	83%	
	-20°C	65%	
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%	
	Capacity After 6 Months Storage	82%	
	Capacity After 12 Months Storage	65%	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 3.6A Voltage 7.25~7.45V	
	Float (25°C)	Charge Voltage 6.8~6.9V	

Residual Capacity

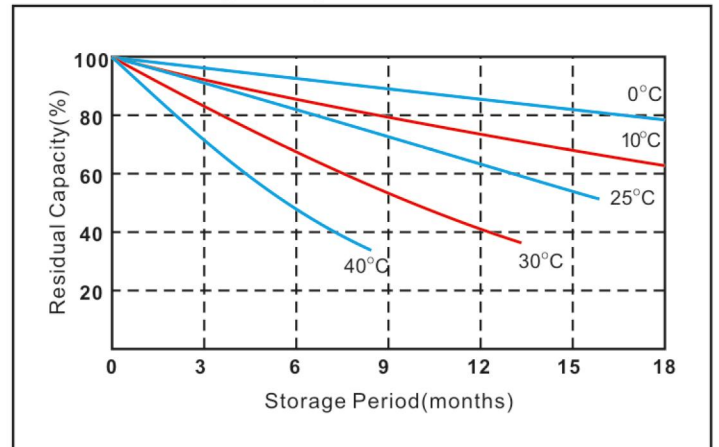


Discharge Current 25°C

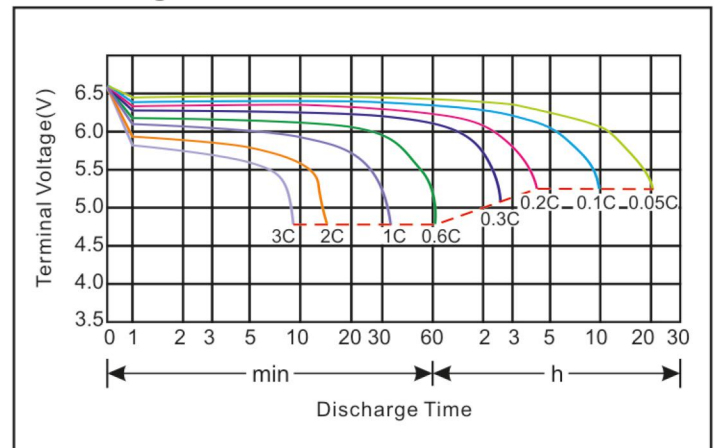


★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

Model No : NP 12 -6 6 V 12 AH

Constant voltage charging characteristics

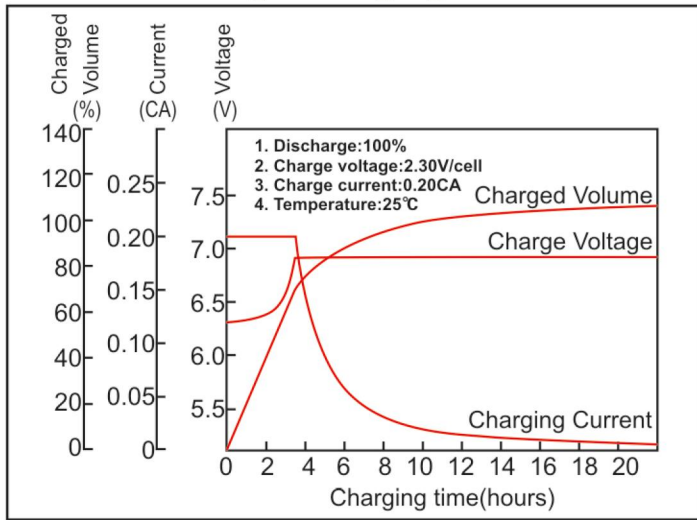

Float Life

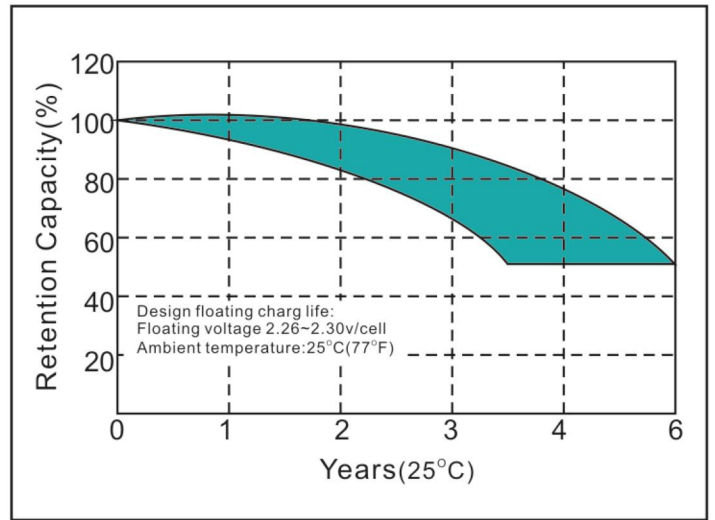

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
4.80V	52.65	34.70	25.65	14.31	7.83	4.32	2.94	2.04	1.35	1.09	0.61
5.10V	50.09	32.67	24.44	13.77	7.52	4.25	2.90	2.01	1.34	1.09	0.61
5.25V	48.74	32.13	24.03	13.37	7.37	4.21	2.88	2.00	1.32	1.08	0.61
5.40V	46.98	31.05	23.36	13.10	7.14	4.17	2.85	1.97	1.32	1.08	0.59

Constant Current Discharge Characteristics (Watt, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
4.80V	293.63	195.75	146.48	81.68	45.36	25.25	17.48	12.15	8.17	6.56	3.65
5.10V	279.45	184.28	139.05	78.98	43.54	24.91	17.21	12.02	8.03	6.56	3.65
5.25V	271.35	180.90	137.03	76.28	42.66	24.64	17.08	11.88	7.90	6.48	3.65
5.40V	261.90	174.83	132.98	74.93	41.38	24.37	16.94	11.75	7.83	6.48	3.56

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	6V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.



MSDS